

SERIES 2570

3/4" DEFROST / SEALED THERMOSTATS

Typical Applications:

- *Refrigerators and Freezers*
- *Air Conditioning, Ventilating and Heat Pump Equipment*
- *Food Dispensing Equipment*



The SENASYS 2570 Series Thermostat is a unique patented thermostat package specially designed to combine the proven reliability of the SENASYS 2455RC thermostat together with the high performance characteristics of the SENASYS 3/4" thermostat. **THE RESULT:** A high performance, low-cost thermostat suitable for extreme environmental conditions. (-20°F up to 220°F).

The 2570 Series Sealed Thermostat is manufactured with a high temperature ceramic insulated base encased in a protective nylon boot. Devices are sealed, have a comparative tracking index of +600 per UL 746A and IEC 112; water absorption of 0% and exceptional heat resistance.

SENASYS 2570 Series Sealed Thermostats feature a patented metal sleeve rivet construction listed by many European approval agencies with 4mm over surface clearance current carrying parts to ground.

The 3/4" thermal element of the device with its fast response and sensitivity characteristics is processed to maintain close tolerances and narrow differential performance for extended life.

SENASYS 2570 Sealed Thermostats meet the latest revision of the MIL-STD-202 specification for humidity, moisture resistance, salt spray, freeze and thaw, and shock and vibration.

Devices are available with standard PVC leads and can be custom-designed to meet individual customer requirements.

To insure that a safe combination of thermostat and application is achieved, the purchaser must determine product suitability for their individual requirements.

RATINGS

MODEL	CYCLES	120VAC	240 VAC
2570	100,000	15 Amps Res	8.3 Amps Res
	100,000	4.4 FLA 26.4 LRA	2.2 FLA 13.2 LRA
	100,000	125 VA Pilot Duty	125 VA Pilot Duty

UL and CSA Listings

Recognized under UL File SA4469, CSA File LR21048. The construction of the 2455RBV features a patented metal sleeve insert-rivet construction that allows for satisfactory approvals by European Approval Agencies.

2570	UL Recognized Component: File SA4469, LF21048
	CSA Certified: CSA File LR91244


Standard Temperature Characteristics

Temperature Set Point Ranges If unit falls in overlapping range use higher range	Tolerance Allowance° ± at temperature set points	Mean Differential Number of degrees between opening and closing nominal temperatures	Price Group*
---	---	---	--------------

	Open		Close		°F	°C	
	±°F	±°C	±°F	±°C			
-20 to 80°F -28.89 to 26.67°C	5	3	6	3	10 to 14	5 to 7	V
	5	3	6	3	15 to 19	8 to 11	IV
	5	3	6	3	20 to 29	12 to 16	III
	5	3	7	4	30 to 39	17 to 22	II
	5	3	7	4	40 to 80	23 to 35	I
81 to 200°F 27.22 to 93.33°C	5	3	6	3	10 to 14	5 to 7	V
	5	3	6	3	15 to 19	8 to 11	IV
	5	3	7	4	20 to 29	12 to 16	III
	6	3	8	4	30 to 39	17 to 22	II
	7	4	9	5	40 to 80	23 to 35	I
201 to 221°F 93.89 to 105°C	5	3	7	4	15 to 19	8 to 11	IV
	5	3	7	4	20 to 29	12 to 16	III
	6	3	8	4	30 to 39	17 to 22	II
	7	4	9	5	40 to 80	23 to 35	I

*Grouped according to level of accuracy required. Group I with greatest latitude is less expensive than Group II, etc.

Dimensional Specifications

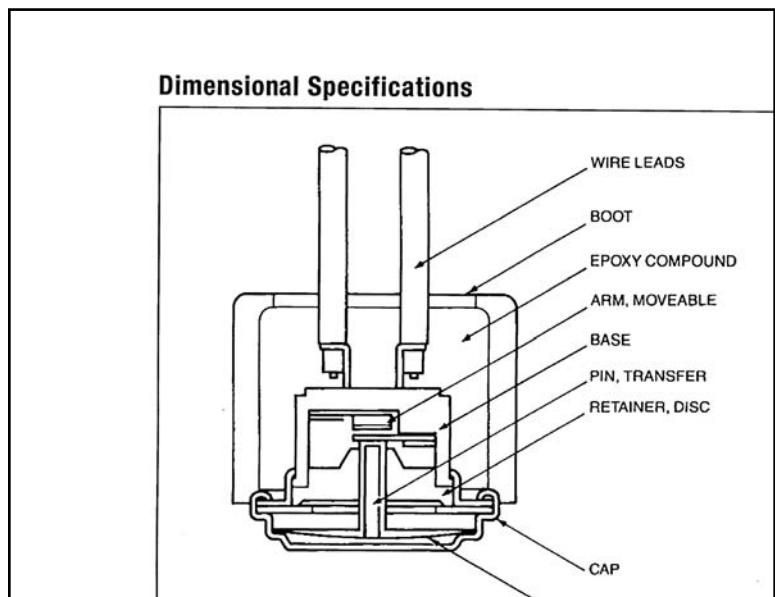

Thermostat Operation

When contacts are closed, current passes from terminal to terminal through the stationary contact to the movable contact which is actuated by the snap movement of the bimetal disc. The disc, which is fully insulated from the switch chamber by the pin and disc retainer, is affected by surface or ambient temperature changes. Upon reaching the opening temperature, the disc snaps from a convex to a concave shape, depressing the pin which opens the contacts. The open circuit allows the temperature to drop and causes the disc to snap to its original position, closing the contacts. A thermostat which closes on a rise in temperature operates in a similar manner, but in reverse action.

Location and Selection of Components

A thermostat can be used to control temperature, to warn in advance of temperatures beyond desired limits, or to shut down an entire system. Response, accuracy, sensitivity, and the ability to sense the thermal parameter in a system depends on the proper selection of a thermostat and its application with respect to location, heat source, electrical load, transfer media, thermal lag, and the design life of the system. Samples of working thermostats or special thermostats with thermocouples installed are available to help you determine the proper combination of location and temperature set points.

Application Parameters

Proper choice of operating temperatures for a thermostat generally depends on many application parameters. The following can have a significant effect on the final operating point of the application:

1. Rate of Temperature Rise
2. Location of the Thermostat
3. Electrical Load
4. Mass of the Thermal System
5. Heat Transfer Medium (air, metal surface, etc.)

Because of these variables, we recommend

that initial testing be performed with thermocouple samples to minimize trial and error when choosing final temperatures and tolerances. When requesting thermocouple samples please specify Iron or Copper Constantan and Lead Length.

SENASYS Sensors Part Number

A complete SENASYS part number consists of 3 parts. (Example: ⁽¹⁾2511 ⁽²⁾F002-⁽³⁾2015) The first group specifies the series. The second group identifies the terminal and bracket combination desired and is generally unique to that series only. The last group is sequentially assigned by SENASYS Sensors' Application Engineering Dept., and defines the temperature parameters, etc., unique to that device.

Testing Procedures

Temperature testing is performed using either liquid or air as a test medium. To allow for variation in temperature checking methods, a 1°C allowance should be considered. This allowance is for correlation or differences between test instruments. Manufacturing specifications and production testing are to specified requirements and do not make use of the correlation variance.

Creep testing is the verification of an instantaneous change of state of the electrical contacts.

The Dielectric withstand voltage test (Hipot) is performed at a higher voltage for a short duration than the rated voltage of the thermostat. This helps assure satisfactory performance at rated voltage and also the ability of the unit to withstand momentary overpotentials. This test also serves to determine whether insulating materials and spacing are adequate.

Samples and Ordering

To order samples please refer to the form on the inside back cover. If you need assistance call us at (888) 736-2797, or e-mail us at support@senasys.com.

Definitions

Automatic Reset: A type of thermostat that will reset itself at a specific temperature; (i.e. a thermostat opens at 150°F and closes or resets itself at 120°F)

Bimetal: Two dissimilar metals bonded together to form the disc that actuates the thermostat; upon reaching a specified temperature, the disc snaps over the center.

Close On Rise: (COR) refers to operation of the contacts. When the temperature rises to its set point the contacts close or make contact and complete the circuit.

Dielectric Strength: Is the deliberate application of a pre-determined overvoltage to a thermostat for specified time.

FLA: (Full Load Amps) current taken from line by motor when motor is yielding rated hp at rated voltage and frequency.

Manual Reset: A bimetal thermostat with a reset button that must be pressed to reset the device.

Max. Differential: The maximum allowable difference between the actual opening and the actual closing temperatures.

Mean Differential: The difference between the upper and lower nominal set points without regard to tolerances.

Min. Differential: (Sometimes called “Deadband”) The minimum allowable difference actual opening temperature and the actual closing temperature.

Open On Rise: (OOR) refers to the operation of contacts—when the temperature rises to its set point, the contacts open terminating the circuit.

Phenolic: A plastic used as the insulating body of the thermostat.

Set Point: The nominal temperature at which the thermostat is to open or close.

SPST: (Single Pole/Single Throw) an electrical switch with one set of terminals that terminate or actuate a circuit.

Tolerance: The allowable range above and below the set point temperature.

Quality Control and Application

The entire production process from preassembly to shipping of the final product is supervised by a staff of quality control personnel. Specifications and performance characteristics of SENASYS, Inc. stated herein or in any other SENASYS communication are based upon various testing and quality control procedures established by SENASYS. Information regarding such procedures will be provided upon request. SENASYS reserves the right to alter specifications contained herein as it may deem necessary. Purchasers are advised to test and engineer their products and the application of SENASYS's products, particularly where the application is one wherein a malfunction could result in damage or injury. Whenever SENASYS provides analysis or information to assist a purchaser in the application of SENASYS's products, such analysis or information shall not affect any of the foregoing nor shall it constitute a warranty of any kind with respect to said application. Sales by SENASYS are subject to standard terms and conditions set forth in its sales documents. Electrical rating and performance characteristics have been established after testing and review of standard operating conditions. The specifications outlined in the bulletin suggest the performance characteristics when the units are subject to these standard conditions. To ensure that our laboratory test conditions duplicate the performance requirements for the application, all devices should be tested by the purchaser for each application. Terms of all sales be as provided in SENASYS, Inc. standard terms and conditions of sale, including its limited warranty provisions.

REQUEST FOR SAMPLES OR QUOTATION

DO NOT DETACH!
Photocopy & Fax
to SENASYS
(419) 818-0897

For information on other
SENASYS products

CMC Multi-Light
Control Switches

P-Series Controls

Company _____ Telephone _____

Name _____

Street _____

City _____ State/Zip _____

Describe the Application: _____

New Product **Existing Product**

Thermostat Function: High Limit Control Manual Reset

Ambient Conditions:

Exposure Temperature Maximum _____ °F, Duration _____

Minimum _____ °F, Duration _____

Temperature Rate of Rise _____ °F per minute _____

Environmental Seal Hermetic Dust Proof Unsealed

Electrical Load:

Voltage _____ AC DC

Resistive _____ AMPS Inductive _____ F.L.A. _____ L.R.A. _____

Dielectric _____ Megohm _____

Life Cycles at Specified Load _____ Cycles

Thermostat Specification:

Contact Open _____ °F ± _____ °F Tolerance

Contacts Close _____ °F ± _____ °F Tolerance (automatic reset only)

Contacts Close Manually (_____) Resettable By _____ °F

Part Number: SENASYS # _____ Customer# _____

Mounting Bracket # _____ Terminal Type _____

Exposed Bimetal Enclosed Bimetal

Sample Quantity:

_____ units Delivery Requested _____

Production:

Estimated Usage _____ Annually, Start Date _____

One Time Order Quantity _____

Agency Approvals:

UL CSA Other _____

Quotation Requested:

Yes No Quantity _____

For special configurations, please provide a sketch.



704 Bartlett Avenue
Altoona, WI 54720

Tel. (715) 831-6353

Toll Free: 1-888-736-2797

Fax: (419) 818-0897

www.senasys.com
support@senasys.com